


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HTP ASIA TECHNOLOGY CO., LTD. .
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HTP ASIA TECHNOLOGY CO., LTD. IS PROHIBITED.


RoHS

IP66~68


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/03/2012
B	Change design	Feb/23/2016




RECOMMENDED
PANEL CUT OUT






PIN ASSIGNMENT
TOP VIEW
(上視圖)



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

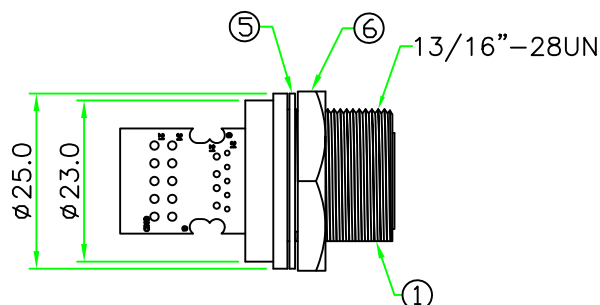

TOP VIEW
(上視圖)

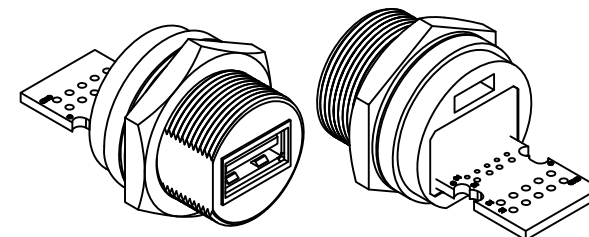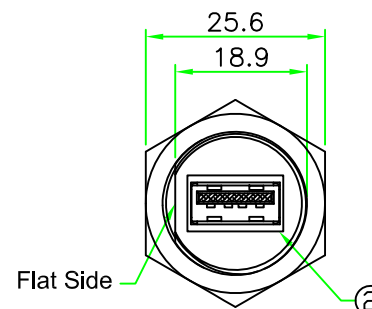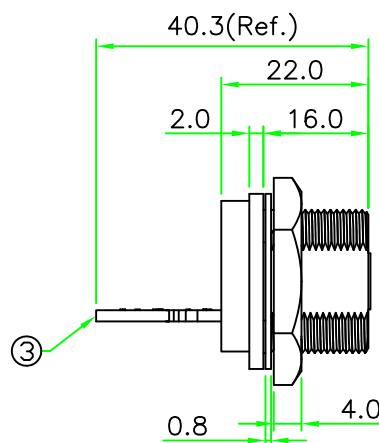

Notes:

Current Rating : 1.5Amp
Contact Resistance : 30m Ohm Max.
Insulation Resistance : 100M Ohm Min.
Breakdown Voltage : ≥ AC 500V/1 Minute.
Operating Temperature : -25°C ~ +85°C.
Panel Thickness Max. : 6mm.

6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	EPOXY.	BLACK		
3	PCB	FR4. Double Size, 1.6mm Thickness.		1	
2	CONNECTOR	USB 2.0 A Type Female Connector.	WHITE	1	
1	BODY	USB A Type Female Connector Body. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : USB 2.0 A Type Female C Size Rear Mount Screw Type Circular Flange With Bare PCB		
SCALE		1:1	P/N: USB2AC-P3C10		DR. JACK
UNLESS OTHERWISE SPECIFIED TOLERANCES:			CH. ERIC		
.X ± 0.5		.XX ± 0.25	DWG.NO: USB2AC-P3C10		AP.
.XXX ± 0.1		ANGLE ± 1°			
REV.	SHEET				
B	1/1				