



RoHS
IP66~68

REV	DESCRIPTION	DATE
A	ISSUE	NOV/05/2008
A1	Changing part number.	OCT/04/2012
A2	Correct P/N & DWG NO	OCT/22/2013
A3	Add Mark ④	JUN/11/2014
B	Change ②Shape	DEC/12/2014

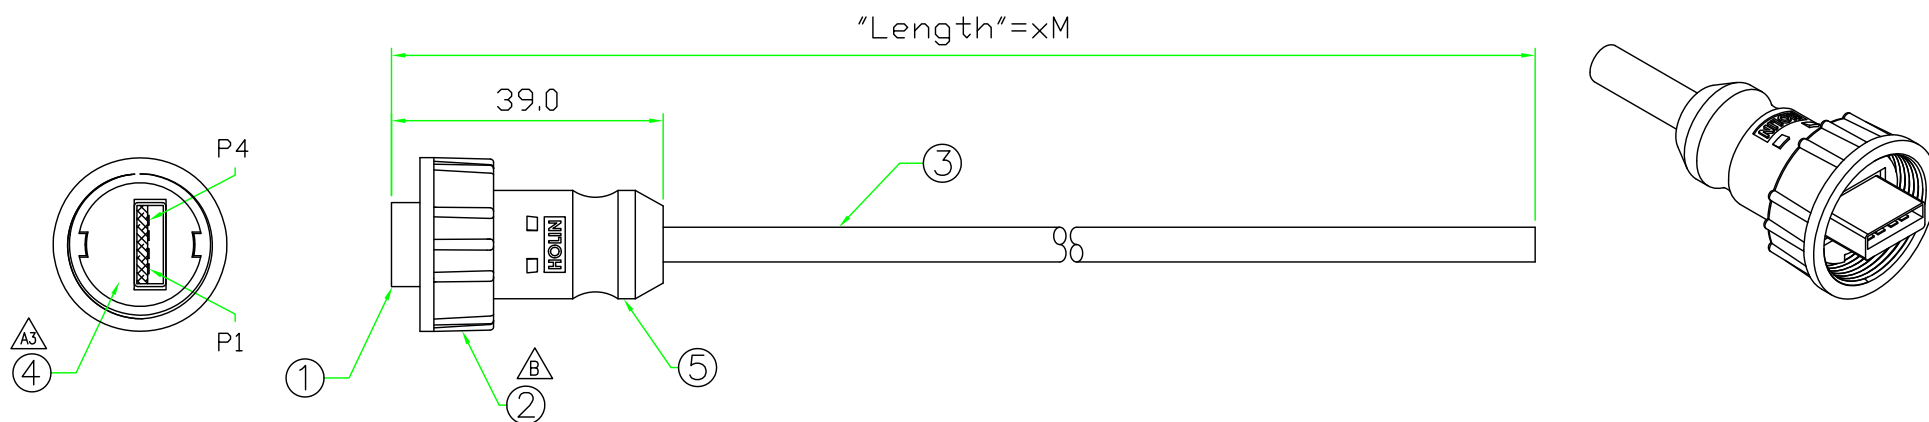

Wiring Diagram

1	—	RED(24AWG)	紅
2	—	WHITE(28AWG)	白
3	—	GREEN(28AWG)	綠
4	—	BLACK(24AWG)	黑
SHELL	—	DRAIN	地線

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVERMOLD	PVC	BLACK	1	
4	GASKET	Rubber.	BLACK	1	
3	CABLE	UL2725 28AWGx1P+24AWGx2C+DRAIN+AL/MYLAR+BRAID	BLACK	1	
2	SCREW NUT	NYLON+GF.	BLACK	1	
1	CONNECTOR	USB A Type Male Connector.	WHITE	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : USB 2.0 A Type Male C Size Screw Type Molded Cable	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N:  USB2AC-P4SN-xxM	DR. Patty
			CH. ERIC
REV. B	SHEET 1/1	DWG.NO:  USB2AC-P4SN-xxM	AP.