
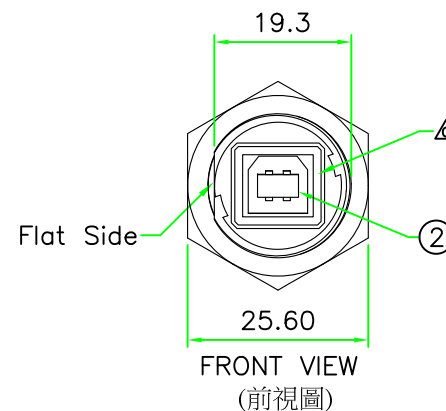
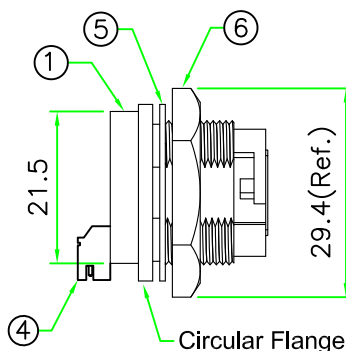
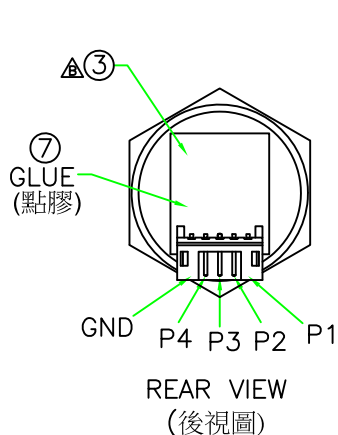
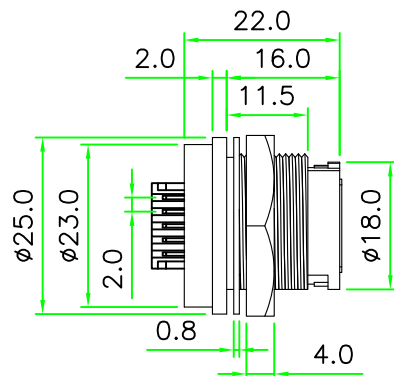



RECOMMENDED
PANEL CUT OUT

RoHS

IP66



NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance: $\leq 30\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
5. Breakdown Voltage: $\geq \text{AC } 500\text{V}/1 \text{ Minute}$
6. Panel Thickness Max. 6.0 mm

7	GLUE	EPOXY.	BLACK		
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	WAFER	PITCH 2.0mm, Right Angle. 5P*1ROW.		1	
3	PCB	FR4 . Double Side, 1.0mm Thickness.		1	PCB-USB2BF
2	CONNECTOR	USB B Type Female Connector.		1	
1	BODY	USB B Type Lock Type Female Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm	TITLE : USB 2.0 B Type Female C Size Lock Type Circular Flange Panel 5 Pin Right Angle Wafer				
SCALE 1:1	P/N: USB2BC-L3C04				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLE ±1°					DR. JAMES
REV. C SHEET 1/1					CH. ERIC
DWG.NO: USB2BC-L3C04					AP.