
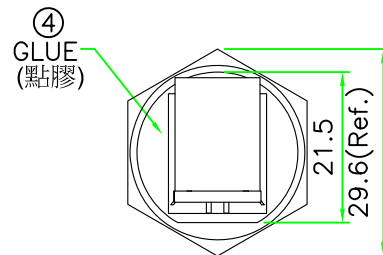



RECOMMENDED
PANEL CUT OUT

RoHS


IP66~68

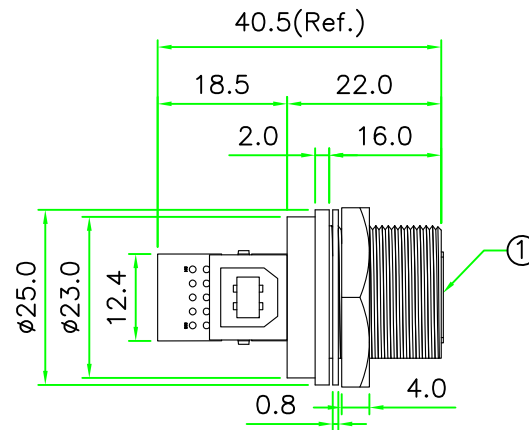



REAR VIEW
(後視圖)

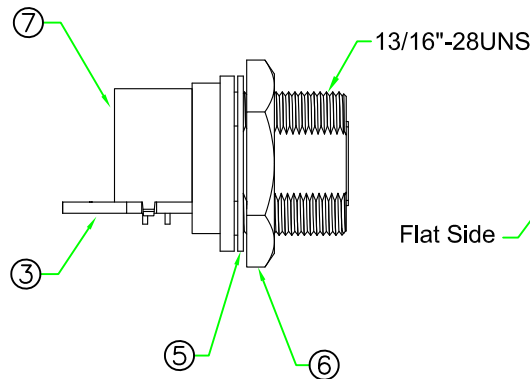

Flat Side

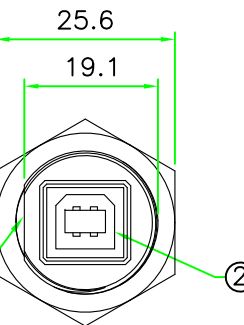

FRONT VIEW
(前視圖)

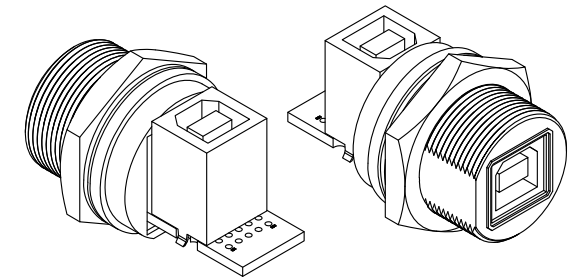

PIN ASSIGNMENT
FRONT VIEW(前視圖)

NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance: $\leq 30\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
5. Breakdown Voltage: $\geq \text{AC } 500\text{V}/1 \text{ Minute}$
6. Panel Thickness Max. 6.0 mm

7	CONNECTOR	USB 2.0 B Type Female Straight PCB Type.		1	
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	EPOXY.	BLACK	1	
3	PCB	FR4. Double Size, 1.6mm Thickness		1	
2	CONNECTOR	USB 2.0 B Type Female Connector.	WHITE	1	
1	BODY	USB B Type Female Connector Body. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : USB 2.0 B Type Female C Size Screw Type Circular Flange Panel With Straight Angle USB 2.0 B Type Female			
SCALE 1:1		P/N: USB2BC-P3CRJ		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DWG.NO: USB2BC-P3CRJ		CH. JAMES	
REV. A		SHEET 1/1		AP.	