


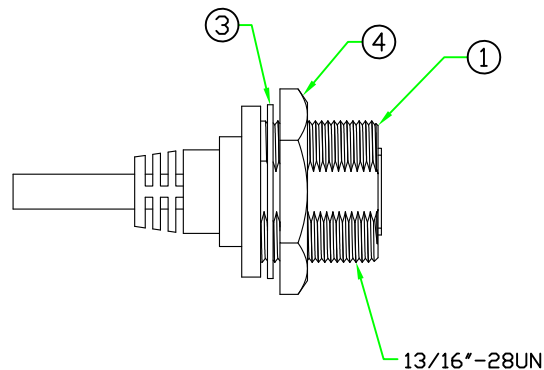


RECOMMENDED
PANEL CUT OUT


RoHS

IP66~68

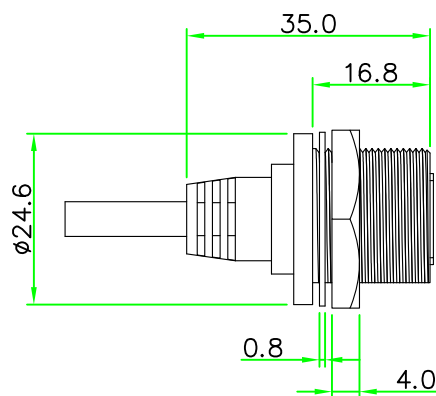

NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -20°C to 80°C
3. Contact Resistance: $\leq 30\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
5. Breakdown Voltage: $\geq \text{AC } 500\text{V}/1 \text{ Minute}$
6. With Waterproof Cap Request
Panel Thickness Max. 5.0



PIN ASSIGNMENT
FRONT VIEW(前視圖)

Wiring Diagram

- | | | | |
|-------|---|--------------|----|
| 1 | — | RED(24AWG) | 紅 |
| 2 | — | WHITE(28AWG) | 白 |
| 3 | — | GREEN(28AWG) | 綠 |
| 4 | — | BLACK(24AWG) | 黑 |
| SHELL | — | DRAIN | 地線 |

5	CABLE	UL2725 28AWGx1P+24AWGx2C+DRAIN+AL/MYLAR+BRAID.	BLACK	1	
4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	USB B Type Female Contact.		1	
1	CONNECTOR	USB B Type Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : USB 2.0 B Type Female C Size Male Connector Female Pin Molded Cable	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N: USB2BC-P3CSM-xxM	DR. Patty
		DWG.NO: USB2BC-P3CSM-xxM	CH. ERIC
REV. A	SHEET 1/1		AP.