

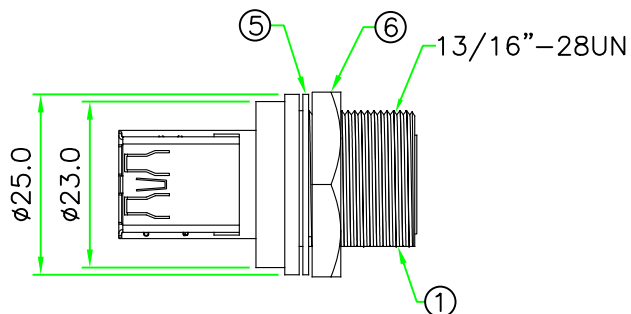




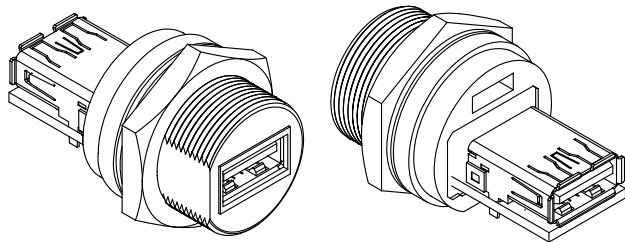


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/03/2012
B	Change P/N NO.	May/23/2014
B1	Correct dimension.	Jun/25/2014
B2	Correct dimension & shape.	Jan/19/2016
C	Change PCB to 4 layer.	Mar/18/2019
D	Change PCB layout.	Oct/26/2021
E	Change PCB layout.	Apr/30/2024

Operating Temperature : -55°C ~ +85°C.




RECOMMENDED
PANEL CUT OUT

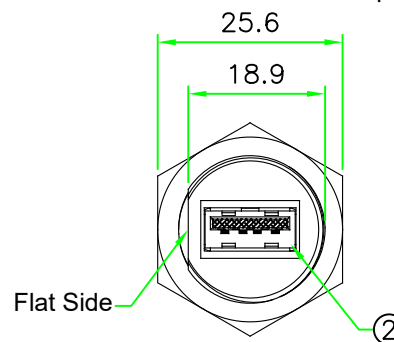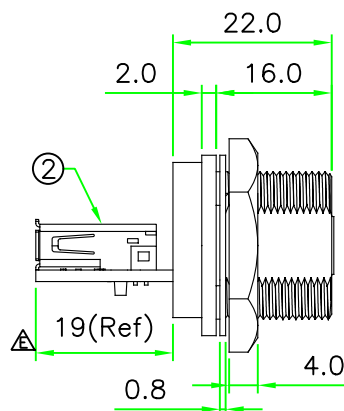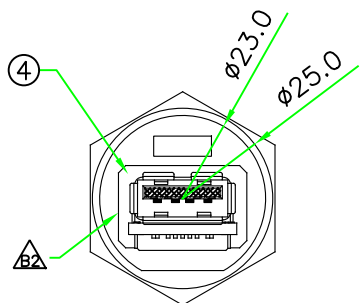


△ WIRING DIAGRAM

USB 3.0 AF	USB 3.0 AF
1	1
2	2
3	3
4	4
5	8
6	9
7	7
8	5
9	6
SHELL	SHELL



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

OLD P/N:USB3AC-P3CRJ
(原型號)

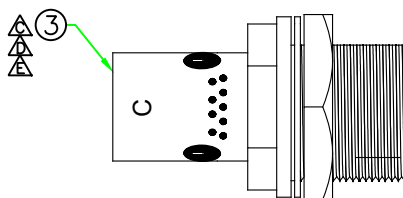

6	HEX NUT	NYLON+GF.	BLACK	1		 UNIT:mm \$SCALE 1:1 UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1° REV. SHEET E 1/1	TITLE USB 3.0 A TYPE FEMALE C SIZE SCREW TYPE CIRCULAR FLANGE PANEL WITH RIGHT ANGLE USB 3.0 A TYPE FEMALE	
5	GASKET	EPDM.	BLACK	1			P/N: USB3AC-P3CSJ 	
4	GLUE	EPOXY.	BLACK	1				
3	PCB 	FR4 . 4 Layer, 1.6mm Thickness		1	PCB-USB3AC-4L-C  (B)			
2	CONNECTOR	USB 3.0 A Type Female Connector.	BLUE	2				
1	BODY	USB A Type Female Connector Body. NYLON+GF.	BLACK	1			DR. James CH. Eric	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	DWG.NO:  USB3AC-P3CSJ AP.		