





RECOMMENDED
PANEL CUT OUT



RoHS
IP66~68




PIN ASSIGNMENT
FRONT VIEW
(前視圖)

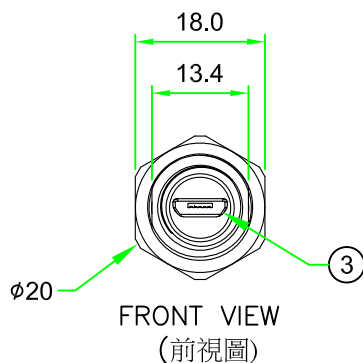

FRONT VIEW
(前視圖)

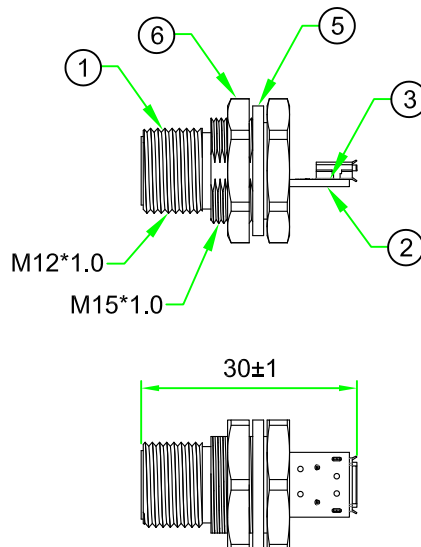

REAR VIEW
(後視圖)

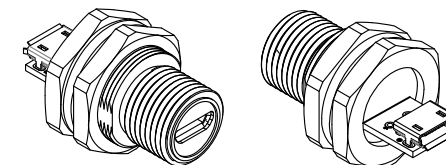

Notes:
Electrical Characteristics:
Current Rating : 1A .
Voltage : 30V.
Insulation Resistance : >100 MΩ.
Contact Resistance : < 40 mΩ.
Connector Temperature Range :
-30°C TO +80°C
Dielectric Withstanding Voltage:
100V AC For One Minute
Panel Thickness : 3.0mm Max.

6	HEX NUT	Nylon+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	Epoxy.	BLACK	1	
3	CONNECTOR	Micro USB B Female 5 Pin PCB Connector.	BLACK	2	
2	PCB	FR4. 1.0mm Thickness. 4 layers.		1	
1	CONNECTOR	Connector Insert.Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : Micro USB B Type 5P Female to Female Rear Mount Hex Flange Panel Connector			
SCALE	1:1	P/N: USBMCB12-P3HSJ			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		DWG.NO: USBMCB12-P3HSJ		DR. SIBYL	
REV.	SHEET	1/1		CH. ERIC	
A1	1/1			AP.	