




RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/11/2018

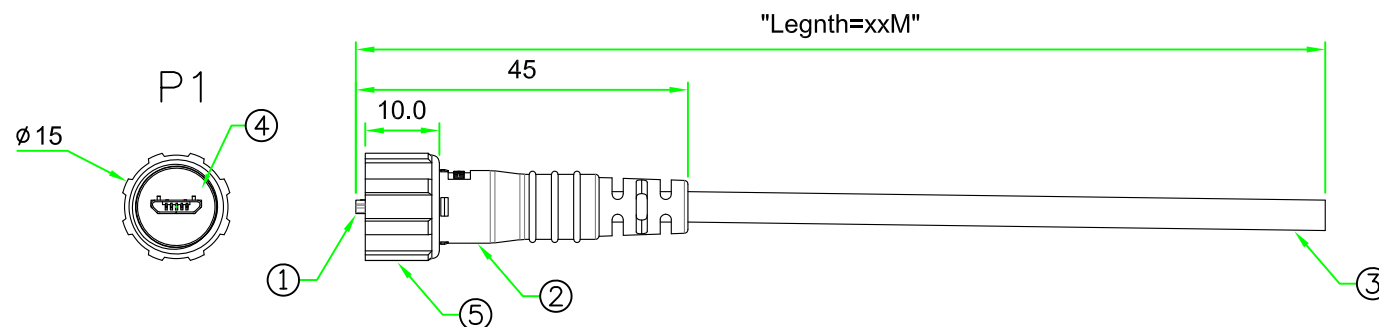

WIRING DIAGRAM

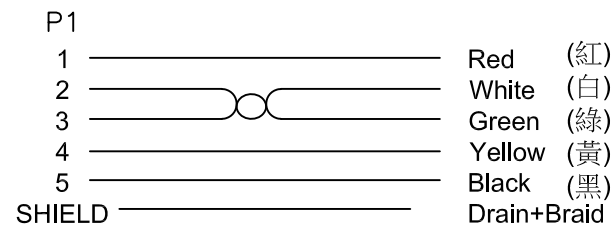

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

5	SCREW NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CABLE	UL2725 28AWGx3C+28AWGx1P+Al/Mylar+Drain+Braid. OD:4.0mm. PVC Jacket.	BLACK	1	
2	OVERMOLD	PVC.	BLACK	1	
1	CONNECTOR	Micro USB B Male 2.0, 30u" Gold Plating Contacts.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE: Micro USB B Type Male Screw Lock Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:			P/N: USBMCB12-P4SM		DR. SIBYL
.X ± 0.25 .XX ± 0.1					CH. ERIC
.XXX ± 0.05 ANGLE ± 1°					
REV. A		SHEET 1/1	DWG.NO: USBMCB12-P4SM		AP.