


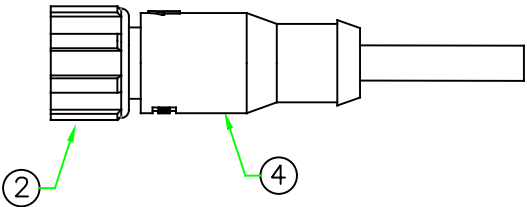

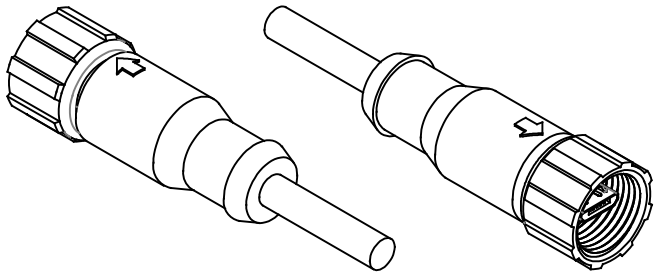


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/12/2025

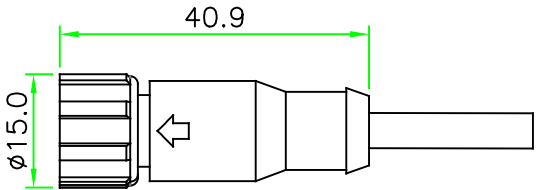

PIN ASSIGNMENT
(前視圖)

*Cable specification and length can be customized.

4	OVERMOLD	PVC.	BLACK	1	98-135
3	GASKET	EPDM.	BLACK	1	
2	SCREW NUT	Nylon+GF.	BLACK	1	
1	CONNECTOR	Micro USB B Male 2.0, 30u" Golde Plating Contacts.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Micro USB B TYPE Male
SCALE	1:1		All Plastic Screw Type Molded Cable
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N:	USBMCB12-P4SN
REV.	SHEET	DWG.NO:	USBMCB12-P4SN
A	1/1		